

MAGNUSON

SUPERCHARGERS



TRIFECTA
PERFORMANCE

Flash Tool Instructions

NOTE TO CUSTOMERS WITH MODIFIED VEHICLES:

The Magnuson calibration included with this kit is intended to work on stock vehicle configurations, including stock trim levels and stock OEM vehicle options. Modifications to your stock vehicle including, but not limited to, engine, flywheel, clutch, torque converter, transmission, wheels, tires, axles, gears, driveshafts, induction system, exhaust system and additional weight (ie. bumpers, racks, etc.) can have a significant impact on your vehicle's calibration and may require modifications to our calibration as supplied.

While we attempt to minimize the need for modifications during our development process, it is impossible for our team to account for all possible build variations/combinations, and in some cases it may be necessary for you to supply an additional element of customization for your vehicle—custom calibration—and to work, at your own direction and expense, with a local service facility to address your unique combination of hardware and make calibration adjustments as necessary.


Please be aware that standard product warranties and governmental emissions certifications are predicated on stock vehicle configurations, and vehicle modifications and calibration changes may affect or even void powertrain warranty and emissions certification status (such as CARB emissions certification). It is the sole responsibility of the customer making a warranty claim to prove that any vehicle modifications and calibration changes were within warranty. It also is the sole responsibility of the customer to determine if the modifications and changes comply with all local, state and federal emissions standards.

Please take the vehicle to a dealer and verify that the vehicle is on the latest calibration offered from the OEM before proceeding.


- 1. Start by connecting a battery charger to the vehicle's battery to ensure that you have at least 12V at all times while following these instructions.




- 2. Download EZ Flash from Magnusonsuperchargers.com

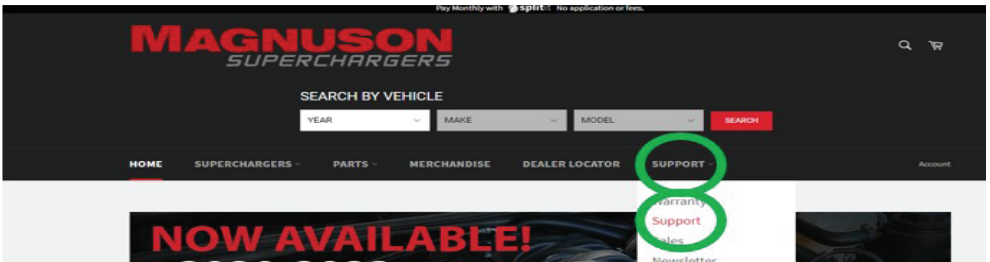


- 3. You will find the Trifecta EZ Flash link in the arrow location on the website.

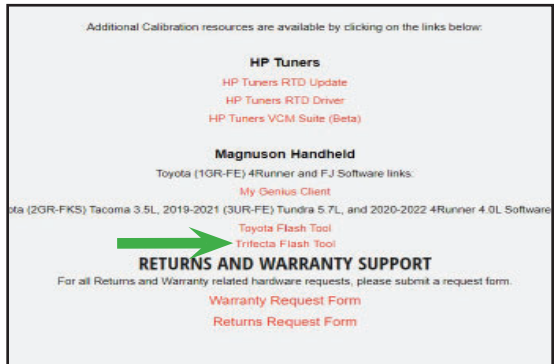


4. Run the EZ Flash installer. Click on the box next to “I agree to the license terms and conditions”.

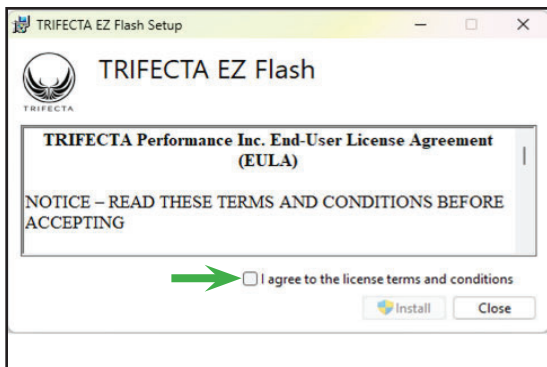

5. Click on install.

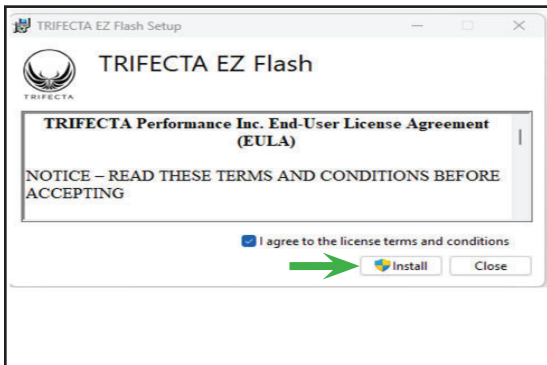


6. If prompted click on yes you trust this software. When the software download is complete click on close.

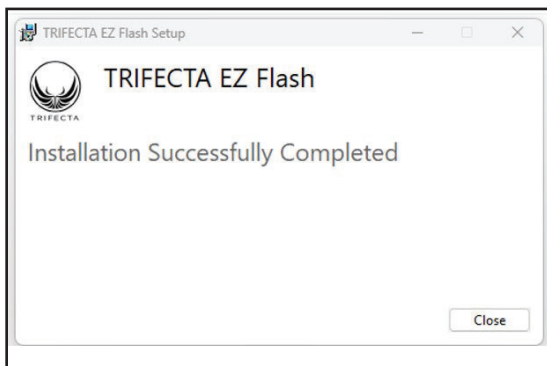


7. Connect the OBD dongle shown below to the USB port on the Laptop and the OBD port the vehicle.




8. Launch EZ Flash from the start menu.

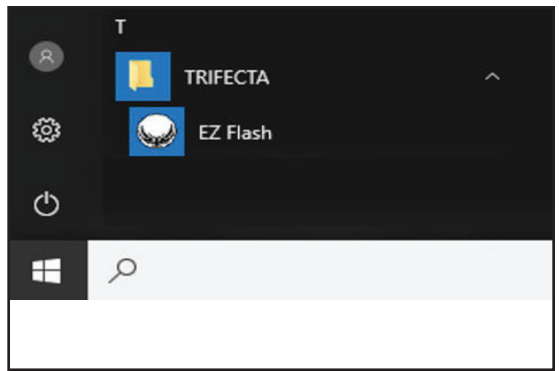

9. Click on "Vehicle Info" -> "Get Vehicle Information".

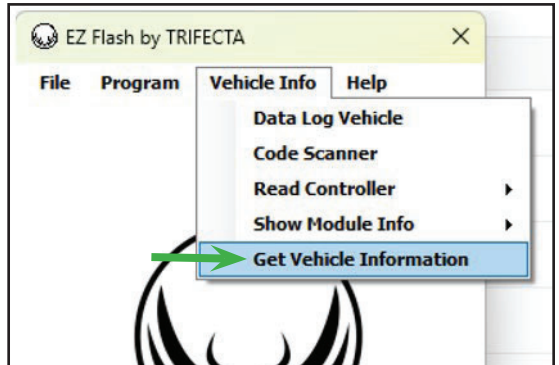


10. Internet connection is required for this step. Please click on "Submit info securely to TRIFECTA". Then click "OK". Follow prompts on the screen and verify it sent.

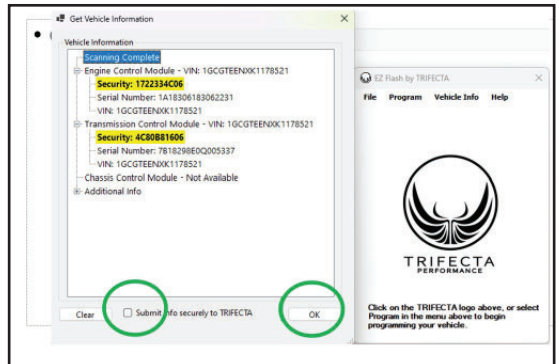


11. Go to MagnusonSuperchargers.com click on: "Superchargers" -> "Chevrolet" -> "Colorado". Select the kit you are installing. Scroll down and click on "Manuals, Documents, and Calibration" Select the "Colorado 3.6L Calibration File Form 1."


12. Fill out the Form. It will take 24-48 hours to receive the calibration back from Magnuson Superchargers. (Monday-Friday excluding holidays).

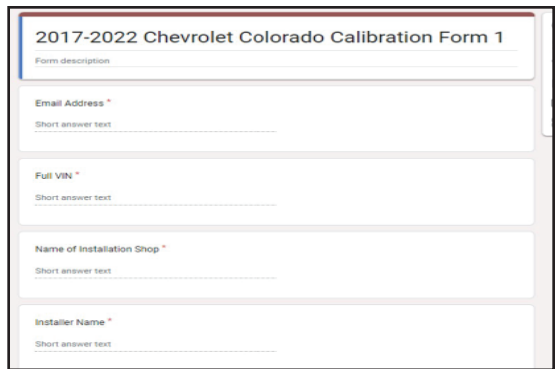


13. Download the file from the email you received from Magnuson Superchargers calibration department.

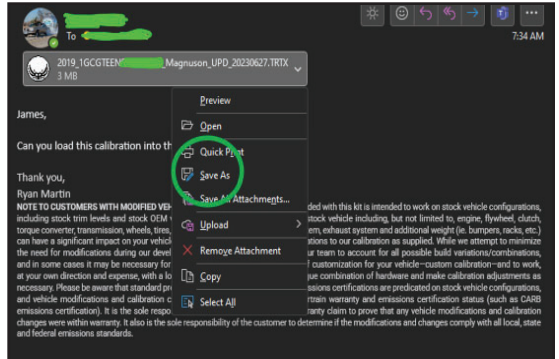


14. Click on Program -> Program Vehicle.

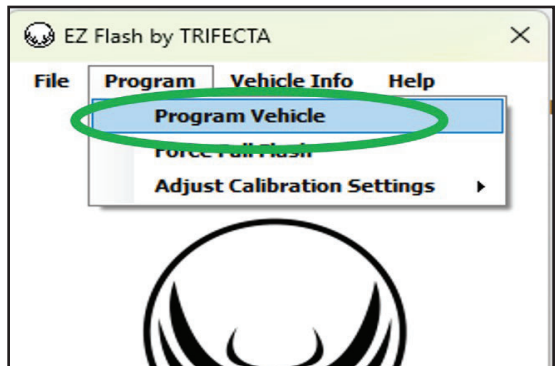


15. Select the calibration file from the spot you saved it on your computer.

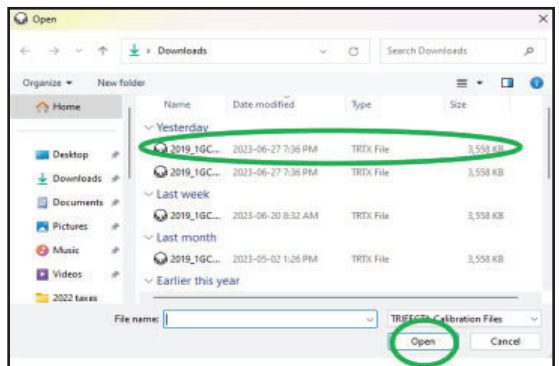

16. Select the “Custom” option. Click “Accept”.

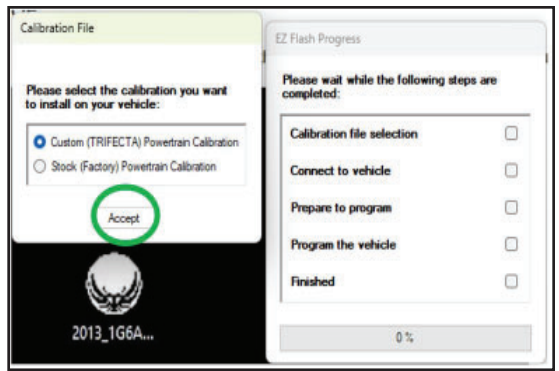

17. Click the box next to “Enable Transparency option”. Click on Accept.

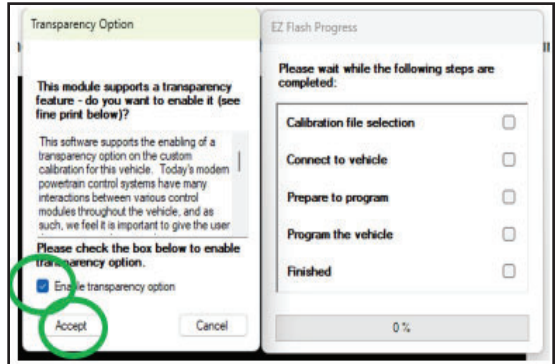

18. Follow on screen prompts. Your file should take about 2-6 minutes to load. If you require assistance, please contact: Support@MagnusonSuperchargers.com

MAGNUSON
SUPERCHARGERS

1990 Knoll Drive, Building A
Ventura, CA, 93003
www.magnusonsuperchargers.com
1.805.642.8833